

EXCAVATORS

Group
D12

Operating weight
29 - 33T

EXCAVATORS

Group
D12


Operating weight
29 - 33T

EXCAVATING BUCKETS

Description: standard bucket with teeth, ESCO/ CAT J tooth system; direct fit on pins or a quick coupler, blade HB500, cutting edges HB400, side plate HB400, bottom stripes reinforcing the body HB400

CODE	Width [mm]	Capacity SAE [L]	Teeth quantity	Type
DG-D12-600mm	600	510	3	GP
DG-D12-700mm	700	650	3	GP
DG-D12-800mm	800	800	3	GP
DG-D12-1000mm	1000	1090	4	GP
DG-D12-1100mm	1100	1240	4	GP/HD*/XHD*
DG-D12-1200mm	1200	1300	4	GP/HD*/XHD*
DG-D12-1300mm	1300	1530	4	GP/HD*/XHD*
DG-D12-1400mm	1400	1680	4	GP/HD*/XHD*
DG-D12-1500mm	1500	1830	5	GP/HD*/XHD*
DG-D12-1600mm	1600	1970	5	GP/HD*/XHD*

*HD version - body HB400
*XHD version - internal stripes HB400; straight or trapezoidal blade, protection of cutting sides, side heel shrouds, body HB400, side plate HB400, lip segments protection

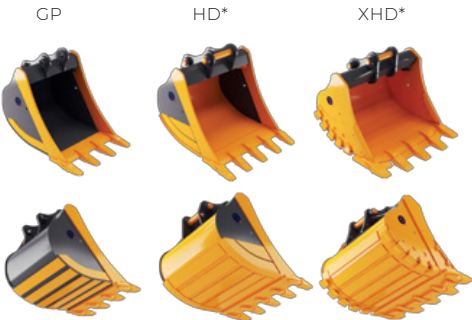

SKELETON BUCKETS

Description: skeleton bucket with teeth, ESCO/ CAT J tooth system; direct fit on pins or a quick coupler, blade HB500, cutting edges HB400, side plate HB400, bars HB400

CODE	Width [mm]	Capacity SAE [L]	Teeth quantity	Type
DS-D12-600mm	600	510	3	GP
DS-D12-700mm	700	650	3	GP
DS-D12-800mm	800	800	3	GP
DS-D12-1000mm	1000	1090	4	GP
DS-D12-1100mm	1100	1240	4	GP
DS-D12-1200mm	1200	1390	4	GP
DS-D12-1300mm	1300	1530	4	GP
DS-D12-1400mm	1400	1680	4	GP
DS-D12-1500mm	1500	1830	5	GP
DS-D12-1600mm	1600	1970	5	GP



RIGID DITCH CLEANING BUCKETS

Description: ditch cleaning bucket with interchangeable blade, direct fit on pins or a quick coupler, blade HB500, cutting edges HB400, bottom stripes reinforcing the body HB400

CODE	Width [mm]	Capacity SAE [L]	Option
DCR-D12-2000mm	2000	1240	LT*
DCR-D12-2200mm	2200	1370	LT*
DCR-D12-2400mm	2400	1500	LT*

*LT -Optional rear blade



DEKPOL STEEL

HYDRAULIC DITCH CLEANING BUCKETS

Description: hydraulic ditch cleaning bucket with interchangeable blade, direct fit on pins or a quick coupler, blade HB500, cutting edges HB400, bottom stripes reinforcing the body HB400, 2 x cylinders 2x45°

CODE	Width [mm]	Capacity SAE [L]	Option
DCH-D12-2000mm	2000	1240	LT*
DCH-D12-2200mm	2200	1370	LT*
DCH-D12-2400mm	2400	1500	LT*

*LT -Optional rear blade



QUICK COUPLERS

Description: mechanical quick coupler and hydraulic one Type Miller, Lehnhoff, Verachtert, OilQuick

CODE	Type	Model
EQC-D12-LEH	Lehnhoff	MS10; MS21-25
EQC-D12-CW	Verachtert	CW45; CW45S
EQC-D12-MI	Miller	-
EQC-D12-OQ	OQ/Volvo	OQ80



RIPPERS

Description: CAT J tooth system, direct fit on pins or a quick coupler; shank reinforced with HB400 metal sheet


CODE	Shank thickness [mm]
R-D12	60



ADAPTER PLATES

Description: adapter plates direct fit on pins or a quick coupler

CODE	Type
EAP-D12-R	Brackets for coupler
EAP-D12-M	Hammer fit
EAP-D12-CH	Grapple fit
EAP-D12-P	Connectors

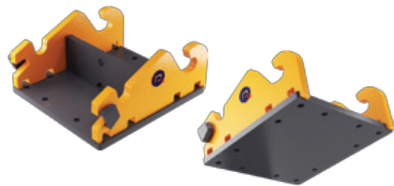

DEKPOL STEEL