

WHEEL LOADERS

Group
W4

Operating weight
7 - 10T

WHEEL LOADERS

Group
W4

Operating weight
7 - 10T

STANDARD BUCKETS

Description: standard bucket with rear bar or screwed skids; ESCO/CAT J/BOFORS tooth system; direct fit on pins or a quick coupler; blades HB500; side bar HB400; bottom stripes HB400;

CODE	Width [mm]	Capacity SAE [L]	Option	Dedicated to
WGP-W4-1400L	2250	1400	LW/Z*	Volvo, parallel kinematics
WGP-W4-1600L	2250	1600	LW/Z*	Volvo, parallel kinematics
WGP-W4-1800L	2250	1800	LW/Z*	Volvo, parallel kinematics
WGP-W4-1300L	2400	1300	LW/Z*	Cat, kinematics type Z
WGP-W4-1500L	2400	1500	LW/Z*	Cat, kinematics type Z

*LW/Z - optional interchangeable blade / teeth




BUCKETS WITH INCREASED CAPACITY

Description: light material bucket max. 600kg/m³; blade HB500; bottom stripes HB400; side bar HB400; direct fit on pins or a quick coupler

CODE	Width [mm]	Capacity SAE [L]	Option
WLM-W4-1800L	2400	1800	LW*
WLM-W4-2000L	2400	2000	LW*
WLM-W4-2500L	2400	2500	LW*

*LW - optional interchangeable blade

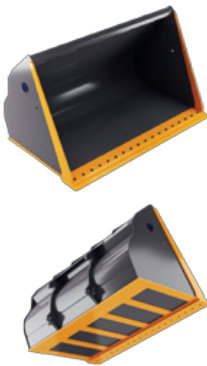


HIGH DUMP BUCKETS

Description: bucket with cylinders placed from outside; blade HB500; bottom stripes HB400; side bar HB400; direct fit on pins or a quick coupler; *spoil density max. 600kg/m³

CODE	Width [mm]	Capacity SAE [L]	Option	Type
WHT-W4-2000L	2400	2000	LW*	Standard bucket
WHT-W4-2300L	2400	2300	LW*	Standard bucket
WHT-W4-3000L	2400	3000	LW*	Light material bucket*

*LW - optional interchangeable blade

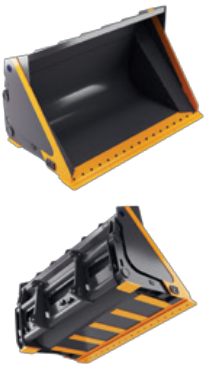

DEKPOL STEEL

SKELETON BUCKETS

Description: bars spacing can be adjusted; blade HB500; side bar HB400; direct fit on pins or a quick coupler; ESCO/CAT J/BOFORS tooth system

CODE	Width [mm]	Capacity SAE [L]	Option
WS-W4-1200L	2250	1200	LW/Z*
WS-W4-1500L	2400	1500	LW/Z*

*LW/Z - optional interchangeable blade / teeth



BUCKETS WITH DOWNHOLDER

Description: blade HB500; bottom stripes HB400; side bar HB400; quick coupler fit;

CODE	Width [mm]	Capacity SAE [L]	Option
WC-W4-1600L	2250	1600	LW*
WC-W4-1800L	2400	1800	LW*
WC-W4-2000L	2400	2000	LW*

*LW - optional interchangeable blade



4IN1 BUCKETS

Description: blade HB500; bottom stripes HB400; side bar HB400; direct fit on pins or a quick coupler; ESCO/CAT J/BOFORS tooth system

CODE	Width [mm]	Capacity SAE [L]	Option
W4/1-W4-1300L	2250	1300	LW/Z*
W4/1-W4-1500L	2400	1500	LW/Z*

*LW/Z - optional interchangeable blade / teeth



FORKS

Description: fork carrier standard FEM2A; quick coupler fit

CODE	Lifting capacity per pair	Forks	Carrier width
WMF-W4-3500KG	3500kg	100x40x1200	1500
WMF-W4-5000KG	5000kg	125x50x1200	1500



LOADER QUICK COUPLERS

Description: quick coupler to meet the standards from Volvo, Komatsu, CAT, JCB, Liebherr and others; hydraulic locking system

CODE	Quick coupler type	Version
WQC-W4-BM	TYPE VOLVO BM	Hydraulic



DEKPOL STEEL